

# NVR-104LS-P4



## Key Features


- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Plug & Play with 4 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 5MP resolution recording
- 1 SATA HDD, up to 10 TB
- Support cloud upgrad

## Specifications


| Model              | NVR-104LS-P4                                                                                                                                                                                                      |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video/Audio Input  |                                                                                                                                                                                                                   |
| IP Video Input     | 4-ch                                                                                                                                                                                                              |
| Network            |                                                                                                                                                                                                                   |
| Incoming Bandwidth | 40Mbps                                                                                                                                                                                                            |
| Outgoing Bandwidth | 40Mbps                                                                                                                                                                                                            |
| Remote Users       | 128                                                                                                                                                                                                               |
| Protocols          | P2P, NTP, DHCP, PPPoE                                                                                                                                                                                             |
| Video/Audio Output |                                                                                                                                                                                                                   |
| HDMI/VGA Output    | HDMI:<br>1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz<br>VGA:<br>1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Audio Output       | 1 RCA                                                                                                                                                                                                             |

|                      |                                                                    |
|----------------------|--------------------------------------------------------------------|
| Recording Resolution | 5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF                            |
| Synchronous Playback | 4-ch                                                               |
| Decoding             |                                                                    |
| Decoding format      | Ultra 265/H.265/H.264                                              |
| Liveview/Playback    | 5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF                            |
| Capability           | 1 x5MP@30, 2 x4MP@25, 2 x3MP@30, 4 x 1080p@25                      |
| Hard Disk            |                                                                    |
| SATA                 | 1 SATA interface                                                   |
| Capacity             | up to 10TB for each disk                                           |
| External Interface   |                                                                    |
| Network Interface    | 1 RJ45 10M/100M self-adaptive Ethernet Interface                   |
| USB Interface        | Rear panel: 2 x USB2.0                                             |
| PoE                  |                                                                    |
| Interface            | 4 independent 100 Mbps PoE network interfaces                      |
| Max Power            | Max 30W for single port<br>Max 54W in total (13.5W for each)       |
| Supported Standard   | IEEE 802.3at, IEEE 802.3af                                         |
| General              |                                                                    |
| Power Supply         | 48V DC<br>Power Consumption: ≤10 W (without HDD)                   |
| Working Environment  | -10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |
| Dimensions (W×D×H)   | 205mm × 205mm × 46mm (8.1" × 8.1" × 1.8")                          |
| Weight (without HDD) | 0.64kg (1.41lb)                                                    |

## Dimensions

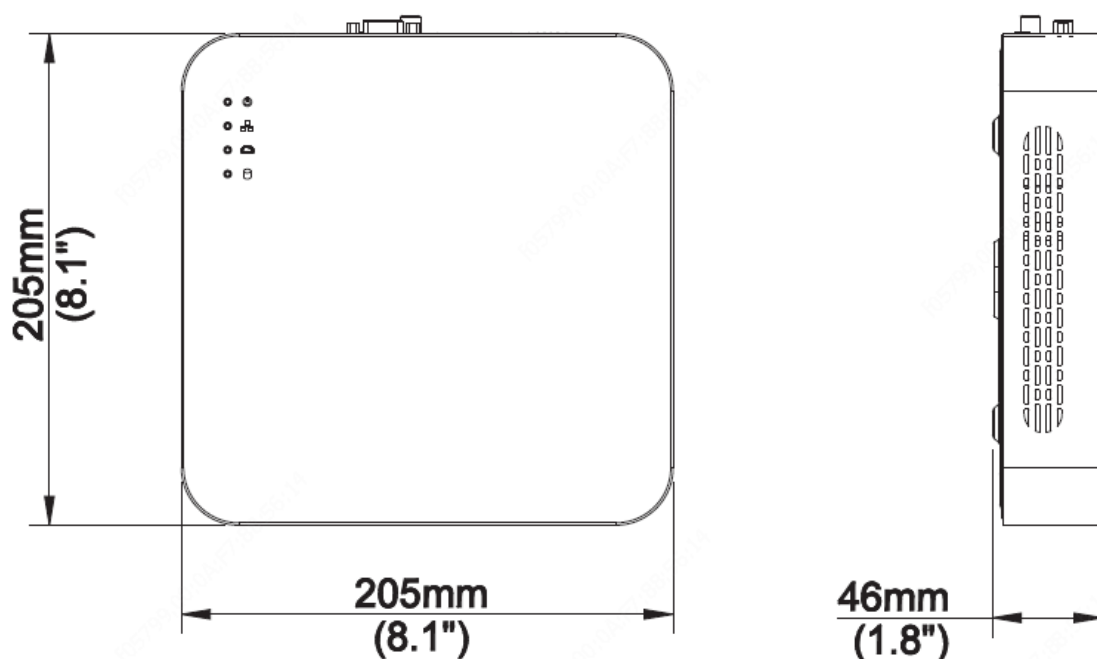

## Rear Panel

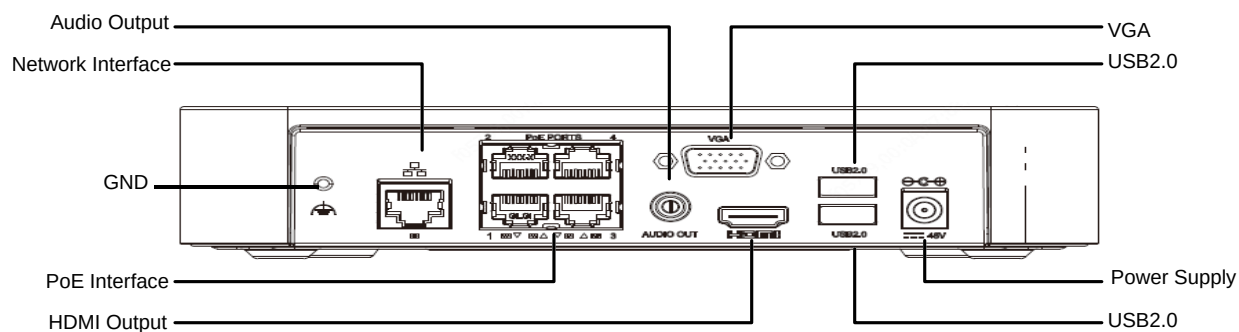

[www.uniview.com/uniarch](http://www.uniview.com/uniarch)

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.